


THIS DRAWING APPLIES TO MODELS KLB AND KLF 56, 66, 68 AND 683 IN STD. 74, 77 AND 78 SERIES. REFER TO NORLAKE KOLD LOCKER SERIES REFRIGERATOR AND FREEZER DRAWINGS AND TABLE BELOW FOR EXACT DIMENSIONS OF UNITS.

NORLAKE WALK-IN 5' X 6', 6' X 6', 6' X 8' OR 8' X 6' REFRIGERATOR OR FREEZER WITH FACE THROUGH WALL TYPICAL ELEVATION DETAIL

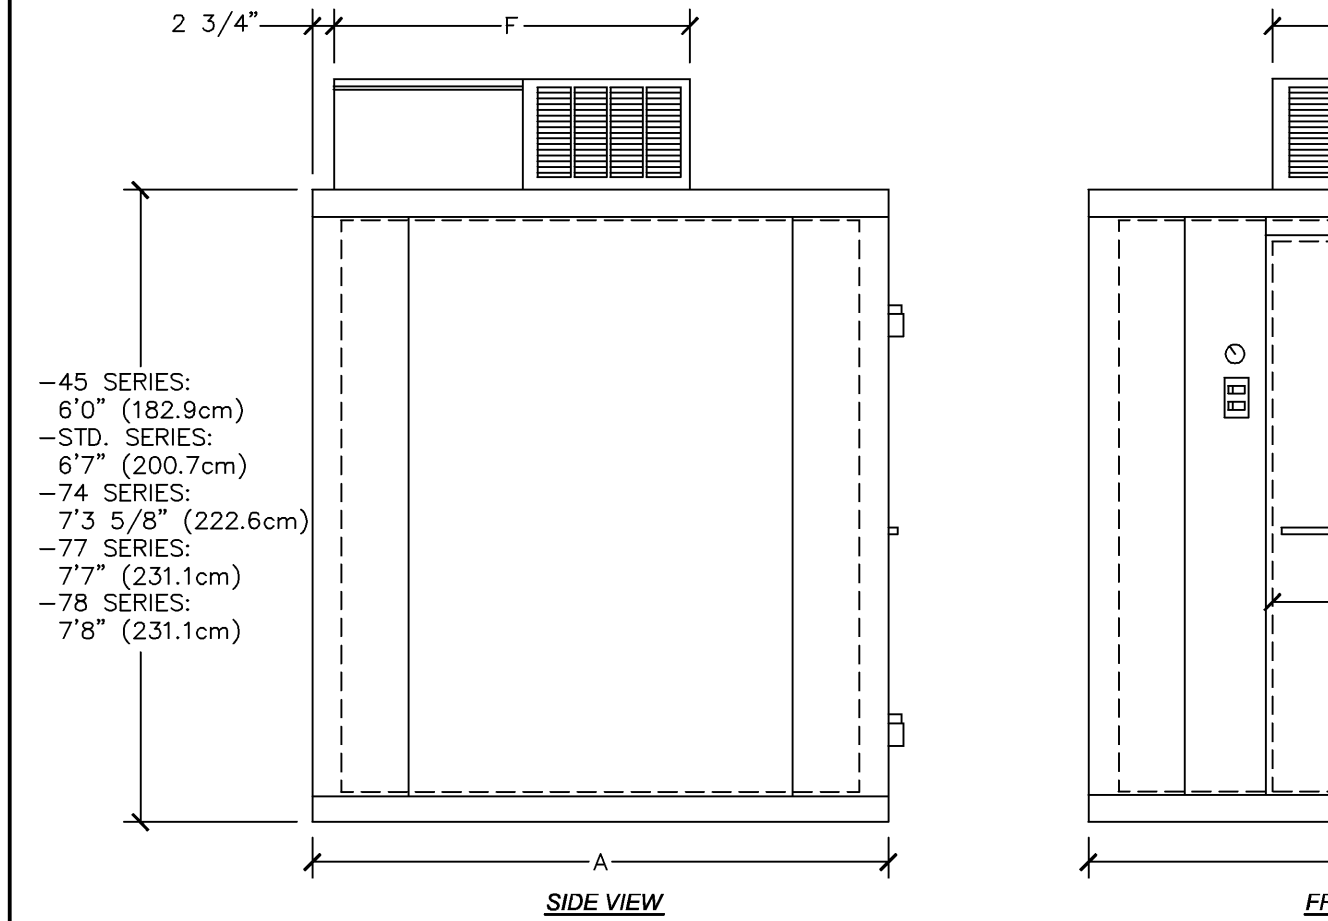


NOTE: KLB = REFRIGERATOR. KLF = FREEZER.

| MODEL # | A | B | C | D | E | F | G | INTERIOR CU. FT. | VOLTS/HZ/PH | MINIMUM CIRCUIT AMPS | TOTAL SYSTEM AMPS | MAXIMUM FUSE SIZE |
|-----------------|-----------------|-----------------|---------------|------------------|---------------------|----------------------|---------------------|------------------|--------------|----------------------|-------------------|-------------------|
| KLB45-CX-SUB | 4' (121.9cm) | 5' (152.4cm) | 26" (66cm) | 59" (149.9cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 77 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB46-CX-SUB | 4' (121.9cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 105 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB56-CX-SUB | 5' (152.4cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 137 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB66-CX-SUB | 6' (182.9cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 37" (94cm) | 48 1/4" (122.6cm) | 14 7/8" (37.7cm) | 168 | 208-230/60/1 | 10.5 | 8.7 | 15 |
| KLB68-CX-SUB | 8' (243.8cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 37" (94cm) | 48 1/4" (122.6cm) | 14 7/8" (37.7cm) | 231 | 208-230/60/1 | 11.9 | 10 | 15 |
| KLB683-CX-SUB | 6' (182.9cm) | 8' (243.8cm) | 26" (66cm) | 66" (167.6cm) | 37" (94cm) | 48 1/4" (122.6cm) | 14 7/8" (37.7cm) | 231 | 208-230/60/1 | 11.9 | 10 | 15 |
| KLB7446-CX-SUB | 121.9cm | 182.9cm | 66cm | 198.1cm | 66cm | 44 1/2" | 14 7/8" | 123 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB7466-CX-SUB | 182.9cm | 182.9cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 196 | 208-230/60/1 | 11.9 | 10 | 15 |
| KLB7468-CX-SUB | 243.8cm | 182.9cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 270 | 208-230/60/1 | 11.9 | 10 | 15 |
| KLB74683-CX-SUB | 182.9cm | 243.8cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 270 | 208-230/60/1 | 11.9 | 10 | 15 |
| KLB7746-CX-SUB | 121.9cm | 182.9cm | 66cm | 198.1cm | 26" | 44 1/2" | 14 7/8" | 123 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB7756-CX-SUB | 152.4cm | 182.9cm | 66cm | 198.1cm | 26" | 44 1/2" | 14 7/8" | 137 | 115/60/1 | 14.2 | 11.7 | 20 |
| KLB7766-CX-SUB | 182.9cm | 182.9cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 196 | 208-230/60/1 | 10.5 | 8.7 | 15 |
| KLB7768-CX-SUB | 243.8cm | 182.9cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 270 | 208-230/60/1 | 11.9 | 8.7 | 15 |
| KLB77683-CX-SUB | 182.9cm | 243.8cm | 66cm | 198.1cm | 37" | 48 1/4" | 14 7/8" | 270 | 208-230/60/1 | 11.9 | 8.7 | 15 |
| KLF45-Cx | 4' (121.9cm) | 5' (152.4cm) | 26" (66cm) | 59" (149.9cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 77 | 208-230/60/1 | 13.4 | 10.7 | 20 |
| KLF46-Cx | 4' (121.9cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 105 | 208-230/60/1 | 13.4 | 10.7 | 20 |
| KLF56-Cx | 5' (152.4cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 26" (66cm) | 44 1/2" (113cm) | 14 7/8" (37.7cm) | 137 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF66-CX * | 6' (182.9cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 39" (99.1cm) | 48 1/4" (122.6cm) | 14 7/8" (37.7cm) | 168 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF68-CX * | 8' (243.8cm) | 6' (182.9cm) | 26" (66cm) | 66" (167.6cm) | 36 1/2" (92.7cm) | 59" (149.9cm) | 22 7/8" (58.1cm) | 231 | 208-230/60/1 | 8.8 | 9.1 | 15 |
| KLF683-CX | 6' (182.9cm) | 8' (243.8cm) | 26" (66cm) | 66" (167.6cm) | 36 1/2" (92.7cm) | 59" (149.9cm) | 22 7/8" (58.1cm) | 231 | 208-230/60/1 | 8.8 | 9.1 | 15 |
| KLF7746-CX * | 121.9cm | 182.9cm | 66cm | 198.1cm | 26" | 44 1/2" | 14 7/8" | 123 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF7756-Cx | 152.4cm | 182.9cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 137 | 208-230/60/1 | 8.8 | 9.1 | 15 |
| KLF7766-CX | 182.9cm | 182.9cm | 66cm | 198.1cm | 39" | 48 1/4" | 14 7/8" | 196 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF7768-CX | 243.8cm | 182.9cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 270 | 208-230/60/1 | 10.8 | 9.1 | 15 |
| KLF77683-CX | 182.9cm | 243.8cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 270 | 208-230/60/1 | 10.8 | 9.1 | 15 |
| KLF7846-CX * | 121.9cm | 182.9cm | 66cm | 198.1cm | 39" | 48 1/4" | 14 7/8" | 113 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF7856-Cx | 152.4cm | 182.9cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 149 | 208-230/60/1 | 8.8 | 9.1 | 15 |
| KLF7866-CX | 182.9cm | 182.9cm | 66cm | 198.1cm | 39" | 48 1/4" | 14 7/8" | 184 | 208-230/60/1 | 13.4 | 8.2 | 15 |
| KLF7868-CX | 243.8cm | 182.9cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 256 | 208-230/60/1 | 8.8 | 9.1 | 15 |
| KLF78683-CX | 182.9cm | 243.8cm | 66cm | 198.1cm | 36 1/2" | 59" | 22 7/8" | 256 | 208-230/60/1 | 10.8 | 9.1 | 15 |


NOTE: EACH DOOR SECTION REQUIRES SEPARATE 115/60/1 HOOK UP AND DRAWS 2.3 AMPS. *THESE SYSTEMS HAVE FAN MOTORS THAT REQUIRE SEPARATE 115/60/1 HOOK UP AND DRAW .75 AMPS. ABOVE SPECIFICATIONS FOR CEILING MOUNT SYSTEMS AND INDOOR USE ONLY. SEE MANUFACTURER FOR DETAILS. WALL MOUNT AND REMOTE COMPRESSORS AVAILABLE. SEE MANUFACTURER FOR DETAILS. ALL TO BE DIRECT WIRING TO CEILING MOUNT SYSTEM TO CEILING FOR SERVICE PURPOSES. (6" MINIMUM) NSF APPROVED. UL LISTING #E-486142 (REPORT #48). E.T.L. APPROVED. CSA FILE 18542-24.

NORLAKE KOLD LOCKER SERIES REFRIGERATOR AND FREEZER

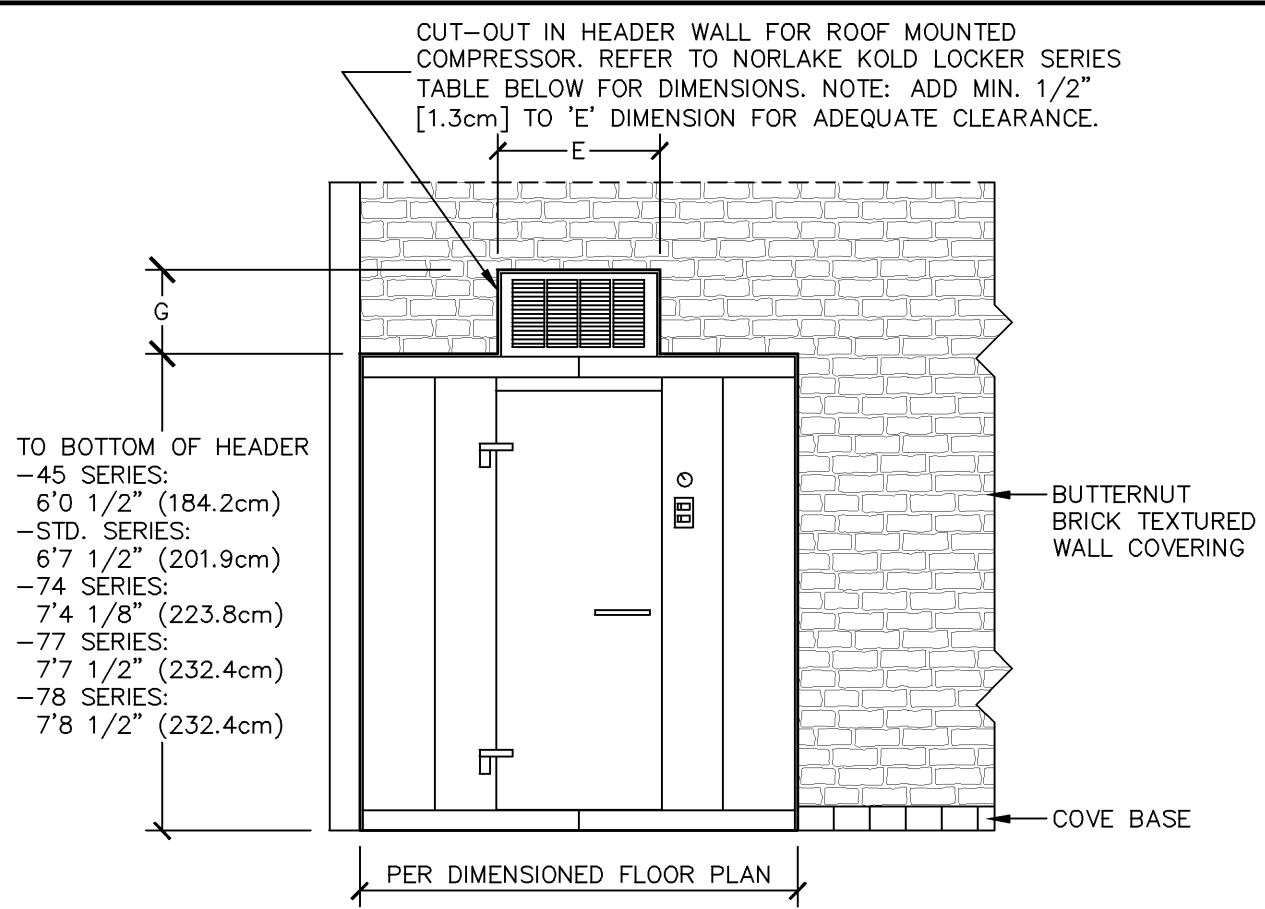


THIS DRAWING APPLIES TO MODELS KLB AND KLF 45 AND 46 IN 45, STD. 74, 77 AND 78 SERIES. REFER TO NORLAKE KOLD LOCKER SERIES REFRIGERATOR AND FREEZER DRAWINGS AND TABLE BELOW FOR EXACT DIMENSIONS OF UNITS.

NORLAKE WALK-IN 4' X 5' OR 4' X 6' REFRIGERATOR OR FREEZER WITH FACE THROUGH WALL TYPICAL ELEVATION DETAIL

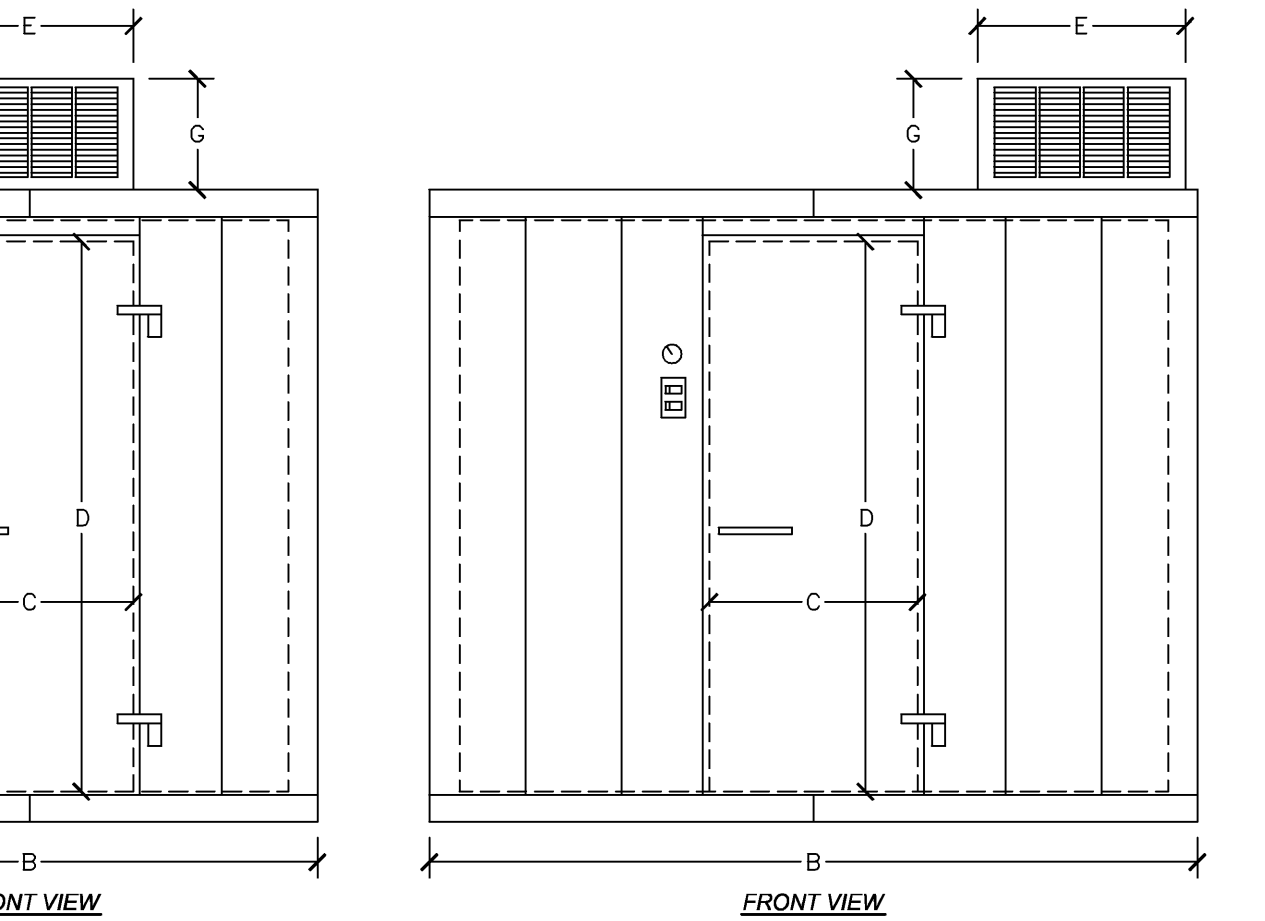


MODELS KLB683 AND KLF683 (STD. 77 & 78) SHOWN ABOVE

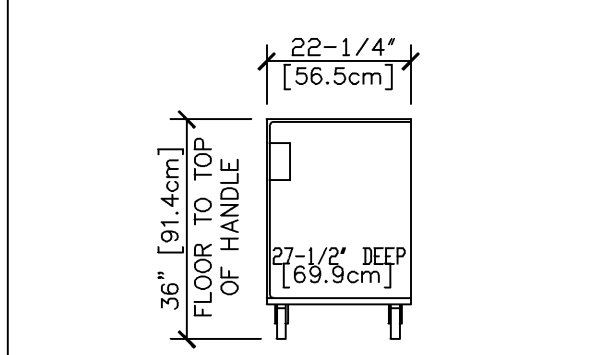


MODEL: CA33-RR12
ALUMINUM WELDED CONSTRUCTION
HOLDS 12 FULL SIZE PANS (18" X 26")
OR 24 HALF SIZE PANS (13" X 18")
NSF APPROVED

LOCKWOOD DECK RETARDER

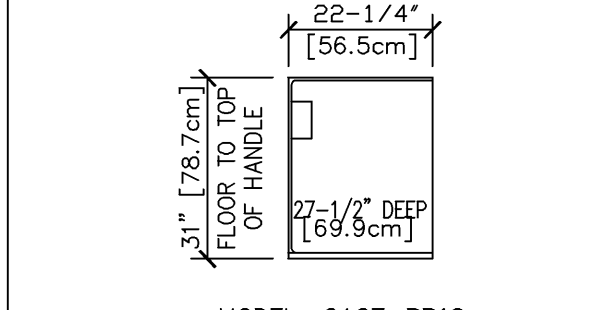

MODEL: CA27-RR12
ALUMINUM WELDED CONSTRUCTION
HOLDS 12 FULL SIZE PANS (18" X 26")
OR 24 HALF SIZE PANS (13" X 18")
NSF APPROVED


LOCKWOOD REACH-IN RETARDER

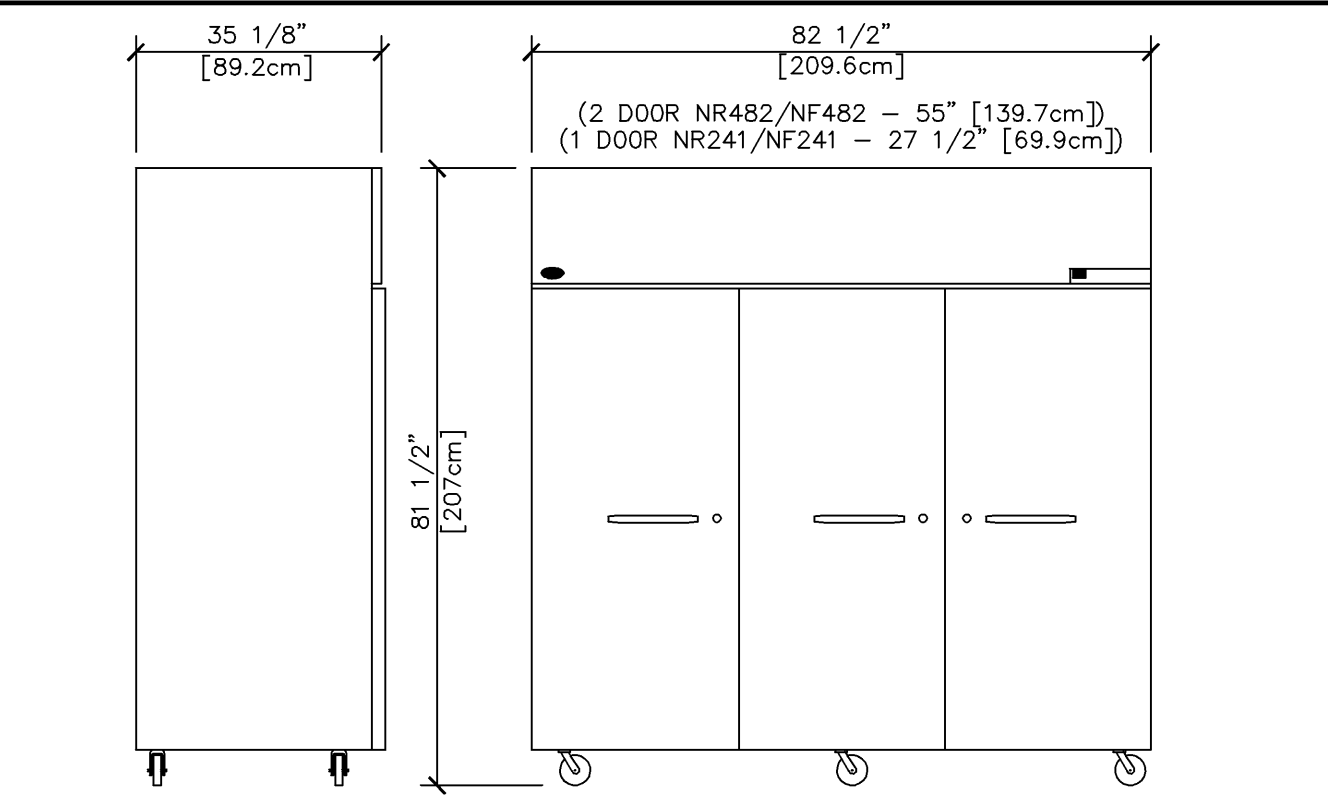

| MODEL # | VOLTS/HZ/PH | AMPS. | INTERIOR CU. FT. |
|------------|-------------|-------|------------------|
| NR241SSS/O | 115/60/1 | 8.6 | 22.5 |
| NR522SSS/O | 115/60/1 | 10.7 | 48.8 |
| NR803SSS/O | 115/60/1 | 10.4 | 75.0 |
| NF241SSS/O | 115/60/1 | 12 | 22.5 |
| NF522SSS/O | 115/60/1 | 12.4 | 48.8 |
| NF803SSS/O | 115/60/1 | 15 | 75.0 |


*20 AMP FUSE IS REQUIRED.

NORLAKE REFRIGERATOR / FREEZER

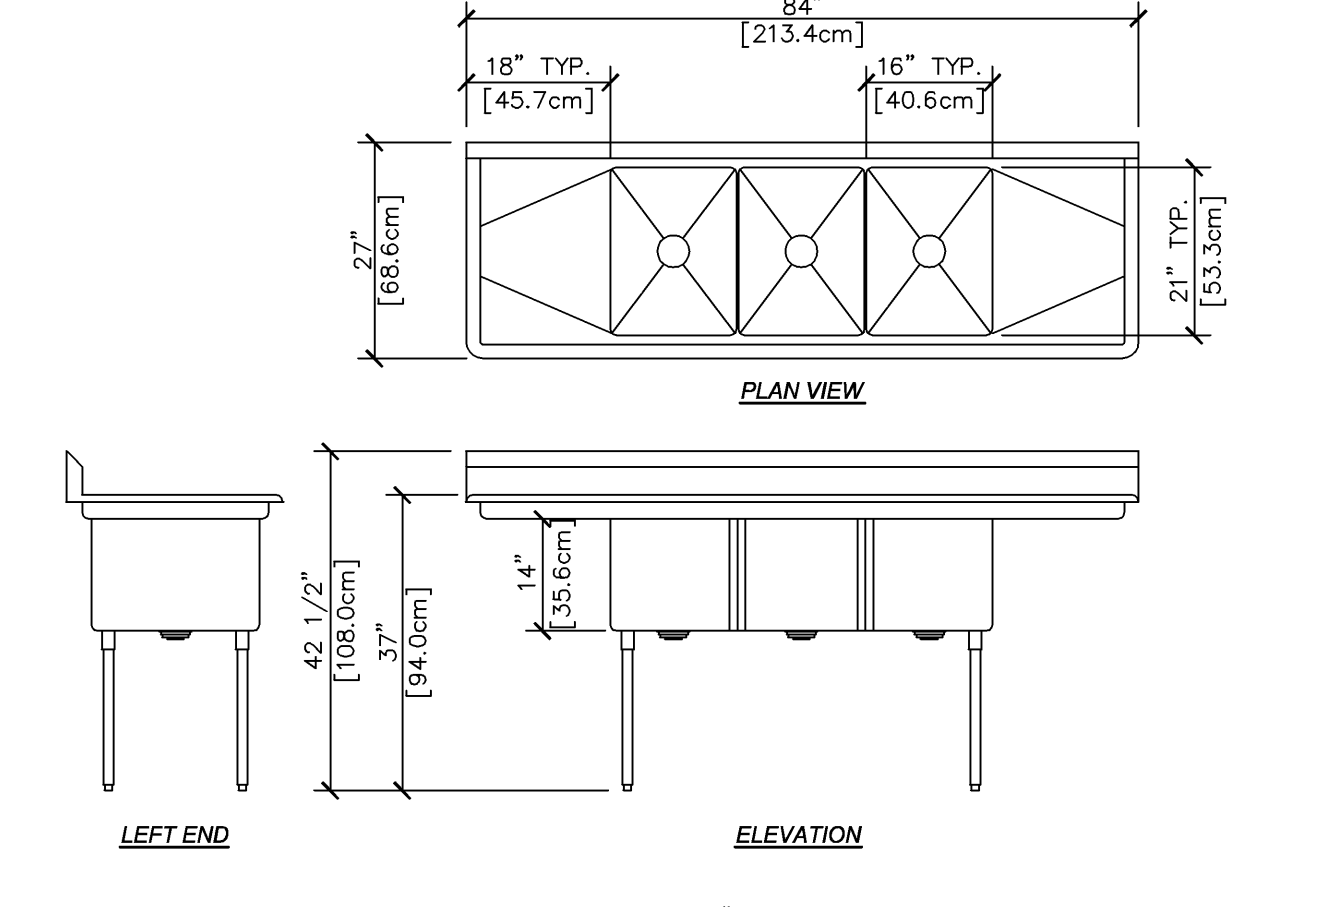


THREE COMPARTMENT SINK WITH TWO 18" DRAINBOARDS SHOWN ABOVE. AVAILABLE WITH ONE, TWO, THREE OR FOUR COMPARTMENTS AND ZERO, ONE OR TWO 18" DRAINBOARDS. 24" OR 30" DRAINBOARDS. THREE COMPARTMENT CORNER SINKS ALSO AVAILABLE. 1/2" NPT WATER LINES, 2" DRAINS. UL AND C-UL LISTED.

DUKE MANUFACTURING STAINLESS STEEL SINK

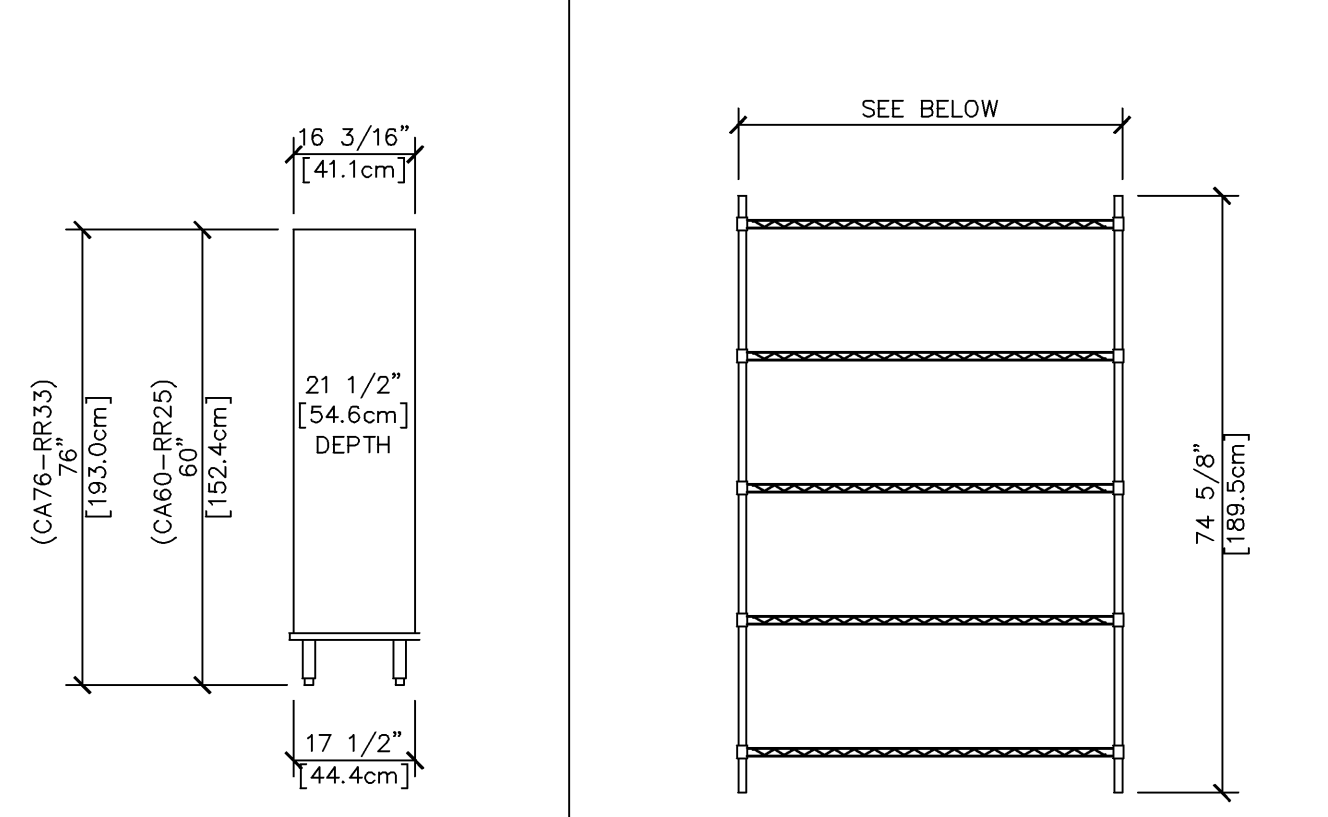

MODEL: CA60-RR25
HOLDS 25 HALF SIZE PANS (13" X 18")
MODEL: CA76-RR33
HOLDS 33 HALF SIZE PANS (13" X 18")
*CA76-RR33 TO BE USED WITH 77 SERIES REFRIGERATOR.
ALUMINUM WELDED CONSTRUCTION
NSF APPROVED

LOCKWOOD RETARDER CABINET

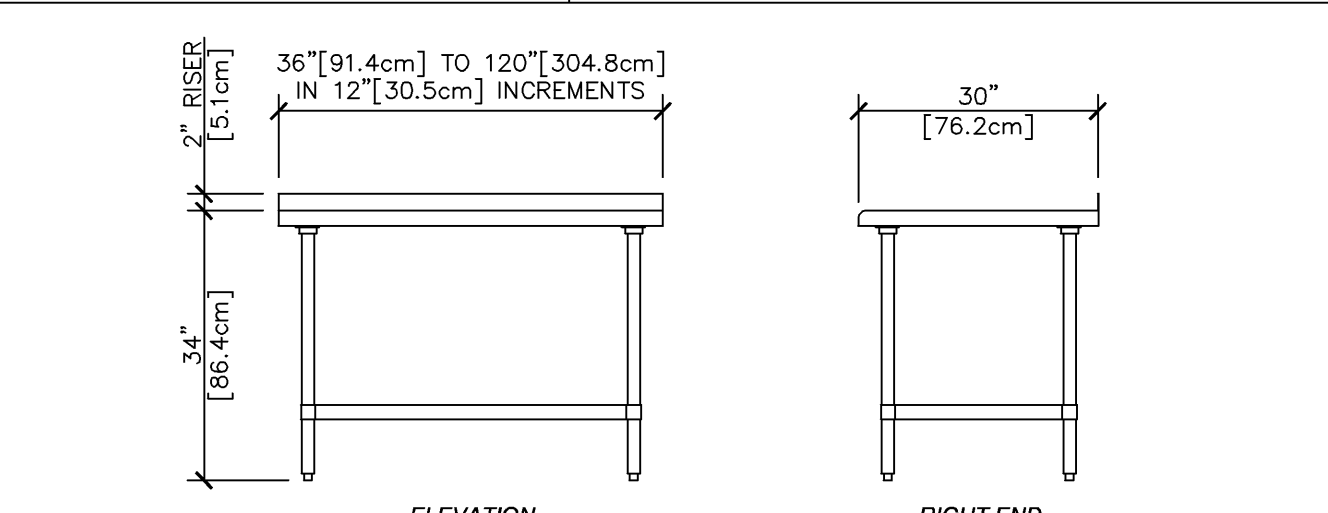

WITH GALVANIZED UNDERSHELF
TABLES 96" AND LARGER HAVE SIX LEGS
DRAWERS ARE OPTIONAL
NSF APPROVED

DUKE STAINLESS STEEL WORKTABLE

NOTE: THESE DRAWINGS REPRESENT TYPICAL EQUIPMENT PURCHASED THROUGH DOCTOR'S ASSOCIATES INC. AND DOES NOT REPRESENT ANY EQUIPMENT PURCHASED LOCALLY BY THE FRANCHISEE/OWNER. OWNERS OF STORES OUTSIDE THE UNITED STATES AND CANADA MAY NEED ALTERNATE ELECTRICAL REQUIREMENTS. CONTACT YOUR DAI COORDINATOR FOR THE MANUFACTURER FOR THE MODIFIED ELECTRICAL SPECIFICATIONS.

STORE MUST BE CONSTRUCTED AS DESIGNED IN THESE FLOOR PLANS SUBJECT TO FEDERAL, STATE AND LOCAL LAWS. RECIPIENT IS RESPONSIBLE FOR ENSURING COMPLIANCE WITH ALL LAWS. IF MODIFICATIONS ARE NECESSARY, PLEASE CONTACT THE FWH STORE DESIGN DEPARTMENT FOR WRITTEN APPROVAL OF THE REQUIRED CHANGES.

THIS DRAWING IS FURNISHED BY FWH ON BEHALF OF DOCTORS ASSOCIATES INC. (DAI) DBA SUBWAY. RECIPIENT MUST DETERMINE IF THIS DRAWING MUST BE SUBMITTED TO A LICENSED ARCHITECT OR SIMILAR PROFESSIONAL UNDER FEDERAL, STATE OR LOCAL LAW. ANY CHANGES MUST BE APPROVED BY DAI.

DO NOT SCALE DRAWING. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS. AND SHALL BE VERIFIED IN THE FIELD BY THE GENERAL CONTRACTOR AND/OR FRANCHISEE/OWNER. ANY DISCREPANCY IN DIMENSIONS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF DAI AREA DEVELOPMENT AGENT OR DESIGNATED FIELD REPRESENTATIVE.

THE GENERAL CONTRACTOR AND EACH SUB-CONTRACTOR SHALL MAKE HIS OWN INSPECTIONS AND MEASUREMENTS. FWH AND DAI SHALL NOT BE HELD RESPONSIBLE FOR THE ACCURACY OF DIMENSIONS AND FOR ERRORS AND OMISSIONS IN THE DRAWINGS IF WRITTEN CONFIRMATION HAD NOT BEEN RECEIVED BY THE FWH STORE DESIGN DEPARTMENT.

THIS DRAWING AND THE INFORMATIONAL CONTENT HERE OF IS THE CONFIDENTIAL PROPERTY OF DAI OF AND IS PROVIDED SOLELY FOR THE USE OF AUTHORIZED FRANCHISEES. THEIR AGENTS AND CONTRACTORS. RECIPIENT AGREES NOT TO REPRODUCE, COPY, USE OR TRANSMIT THIS DRAWING AND/OR ITS INFORMATIONAL CONTENT, IN WHOLE OR IN PART, OR TO ALLOW SUCH ACTION BY OTHERS, FOR ANY PURPOSE, EXCEPT WITH THE WRITTEN PERMISSION OF DAI OR FWH ACTING ON BEHALF OF DAI. RECIPIENT FURTHER AGREES TO SURRENDER THIS DRAWING AND ANY PERMITTED COPIES HEREOF UPON DEMAND.

SUBWAY
WORLD HEADQUARTERS
(203) 877-4281
(800) 888-4848
325 BIC DRIVE
MILFORD, CT 06461

TUSCANY II DECOR BACK-UP SHEET

| REVISION: | BY | DATE |
|---------------------------------------|-----|---------|
| UPDATED ELECTRICAL SPECS ON REACH-INS | PMR | 6/10/09 |
| | | |
| | | |
| | | |
| | | |

| | |
|--------------|--------------|
| DATE: | 10-31-08 |
| DESIGNED BY: | PATRICK ROSE |
| DRAWN BY: | PMR |
| REVIEWED BY: | PMR |
| SCALE: | NOT TO SCALE |

SHEET #: